



SteelROCK PACIFIC-TILE™

Your permanent solution!

Created using the strength of today's high yield, Galvalume® steel the Pacific-Tile provides just the right look for any home without the excessive tile weight. At only 1.5 lbs. / Sq. ft. its one of the lightest roofing tiles on the market today. And by combining the Strength of Steel with the Durability of Rock, offers the best protection for your home.

Whether you need a new roof or a replacement roof, SteelROCK Pacific-Tile's angular design and graceful edge slopes within each panel create a rich deep profile to suit any architecture.

The Pacific-Tile design helps protect your home from Fire, High-Winds, Hail & Snow, by marrying Steel & Rock into a single shield against time - the permanent solution for your home.



SteelROCK
ROOF PRODUCTS

PACIFIC-TILE™



Strong / Durable / Timeless



Every SteelROCK panel is formed from 26-gauge Galvalume® steel and covered with natural stone granules that are embedded in a 100% acrylic resin basecoat. The panels are then finished with a clear acrylic over-glaze to seal and protect the stone granules.

SteelROCK panels are not only strong, light-weight and durable but they've also surpassed the industry's highest performance tests to date. All of SteelROCK's *blended colors are enhanced with flashes of rock granules in either a dark or light accent to add a subtle beauty to the roof's overall appearance.

The panels are backed by a lifetime* limited warranty covering 120-mph winds and a Class-4 Hail impact (UL 2218) resistance rating. SteelROCK is proud to offer today's homeowners and builders a product that will provide years of maintenance free protection and beauty.

Standard Colors:



Charcoal



Weathered Timber



Walnut




Mission Red



Terra-Cotta

Always select colors from actual samples.

Panel Coating Layers

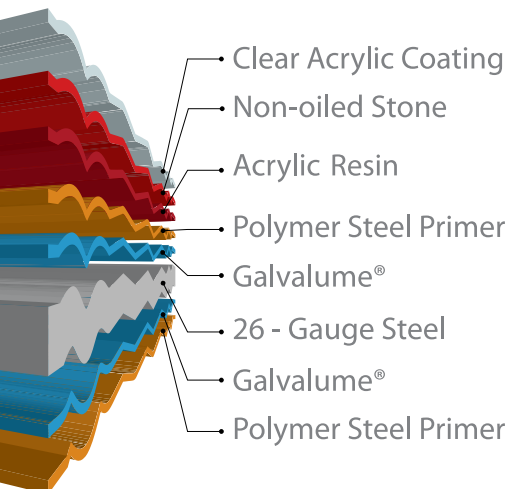

Lifetime Limited Warranty

Non-prorated & fully transferable, *residential single family dwellings, not applicable to entities capable of an infinite life.

Walkable

26-gauge Galvalume® Steel.

Lightweight

1.5 lbs / per sq. ft.

Class-A Fire Rated

Verify correct underlay to meet codes.

120-mph Wind Warranty

Tested in the harshest conditions, can be engineered to meet FL HVHZ wind codes 150-mph.

Hail Impact Warranty

No perforation of the SteelROCK panel from hail UL 2218 Class-4 rated.

Also Available in Premium Colors:



Shadow Wood



Mission Gold



Weathered Slate



Western wood

SteelROCK

ROOF PRODUCTS



SteelROCK Roof Products Inc. Phone: 1-800-987-3199
 2438 East Chapman Ave. Suite 24 Fax: 1-951-245-1156
 Fullerton, CA, USA 92831 www.steelrockroof.com

TESTING CREDENTIALS

ICC Evaluation Report #5218
 Miami Dade NOA # 08-0618.02

* Solid colors Charcoal, Mission Red, Pearl White etc. do not receive a flash accent.
 Galvalume® is a registered trademark of BIEC International
 SteelROCK ©2008, SteelROCK Roof Products, Printed in the U.S.A.
 Manufactured by MRP, Oceanside Ca.